

Fig. 1



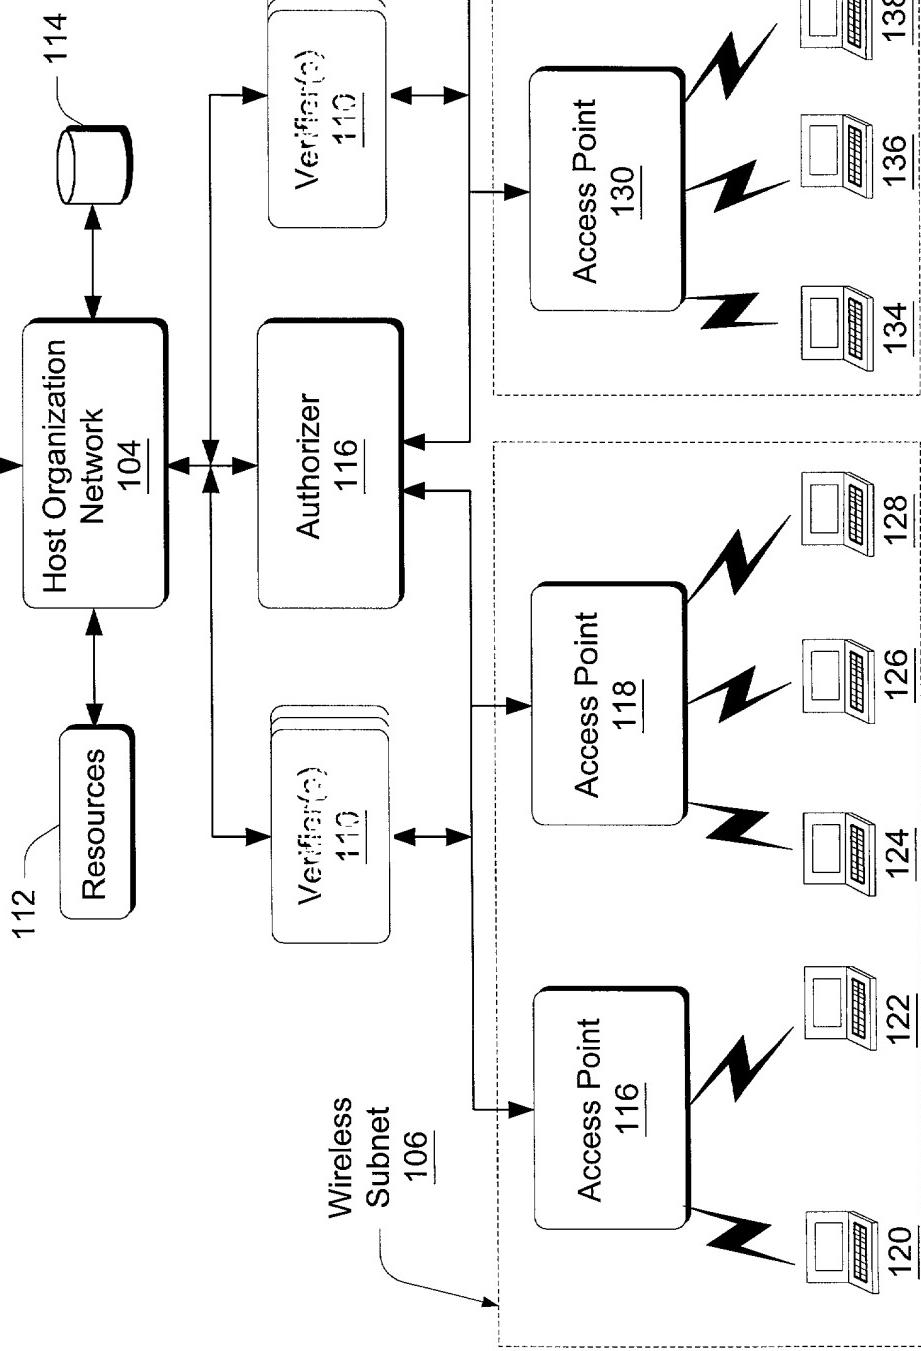


Fig.
2

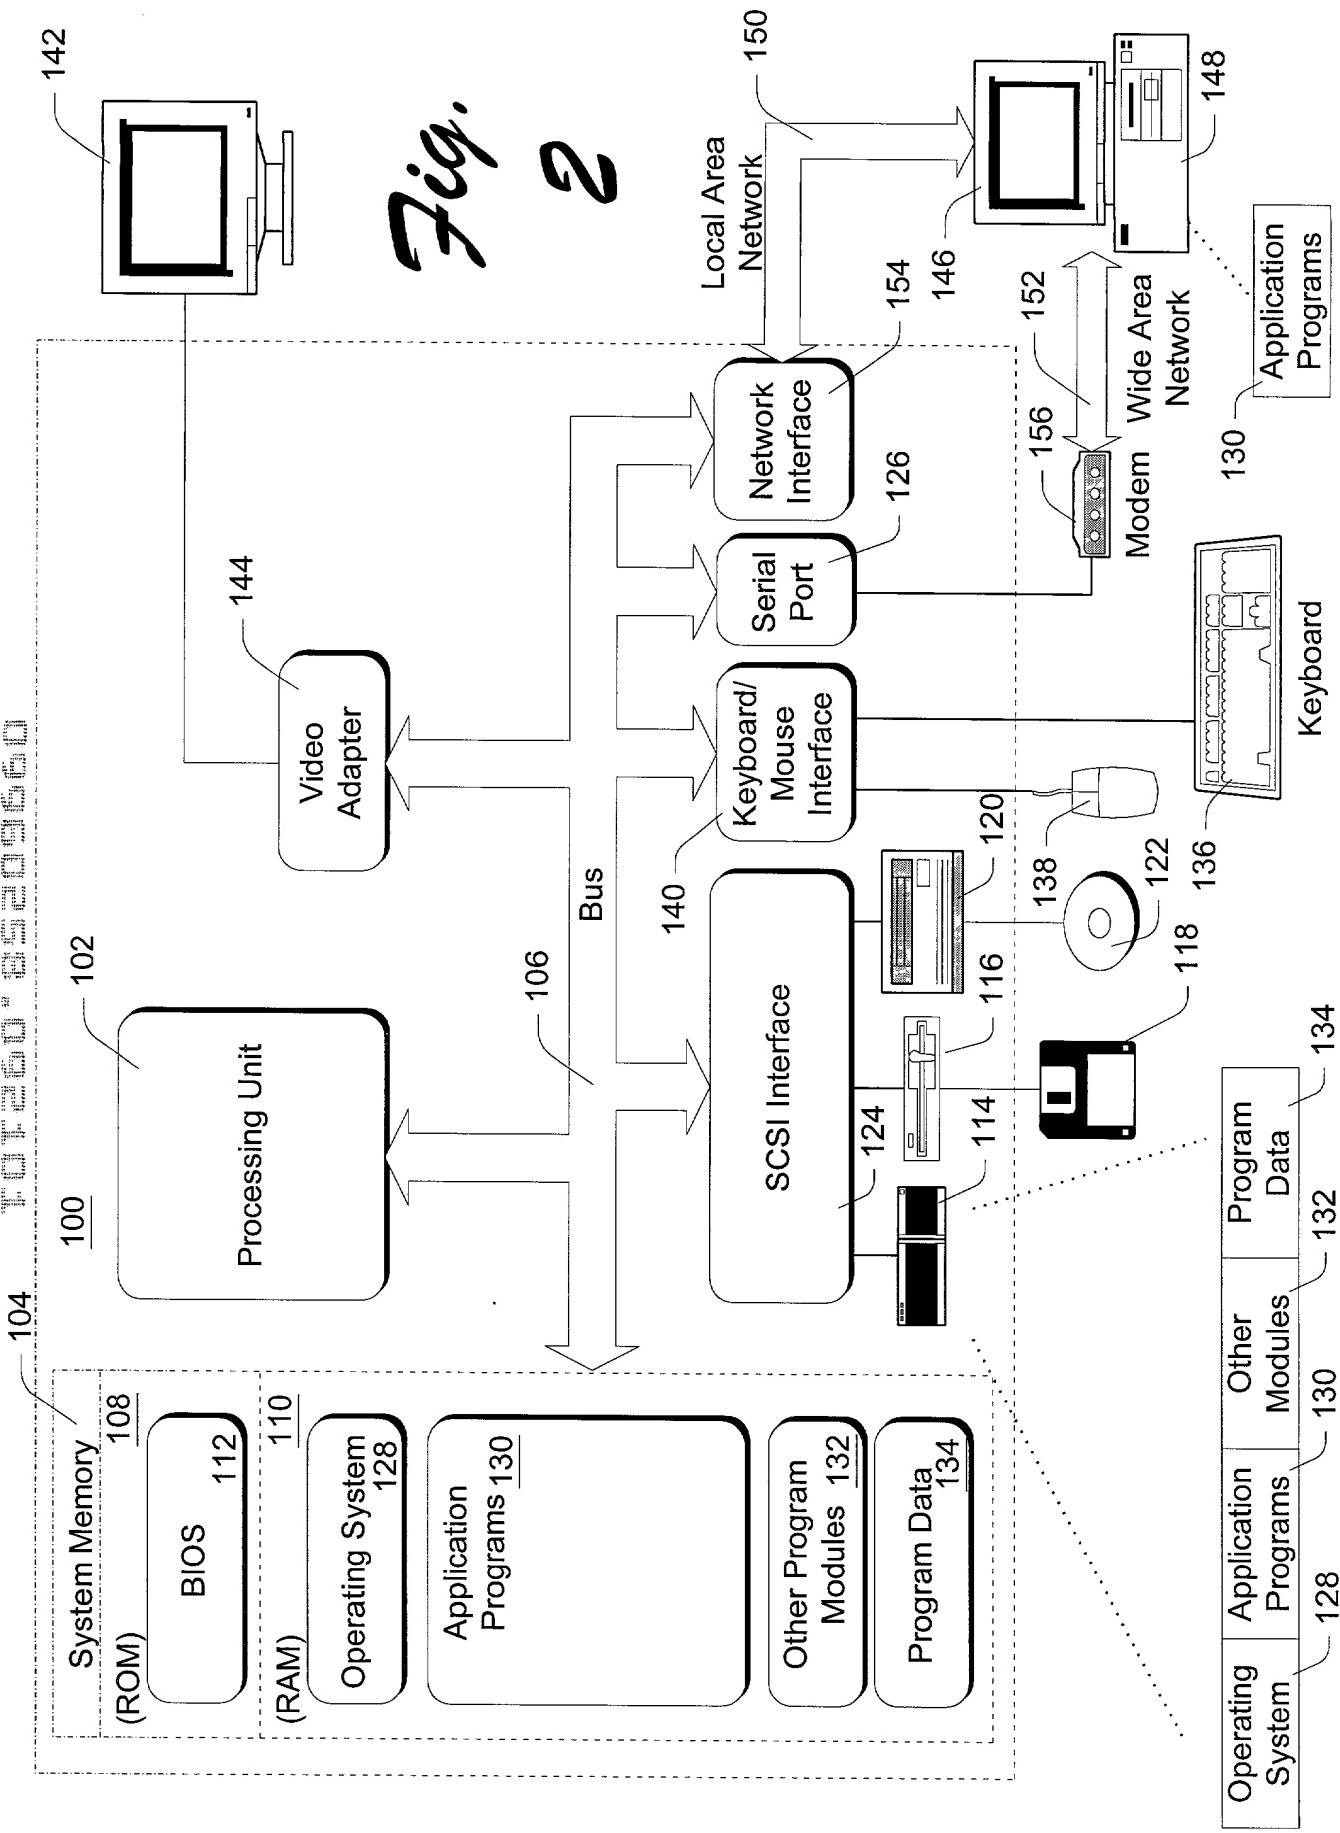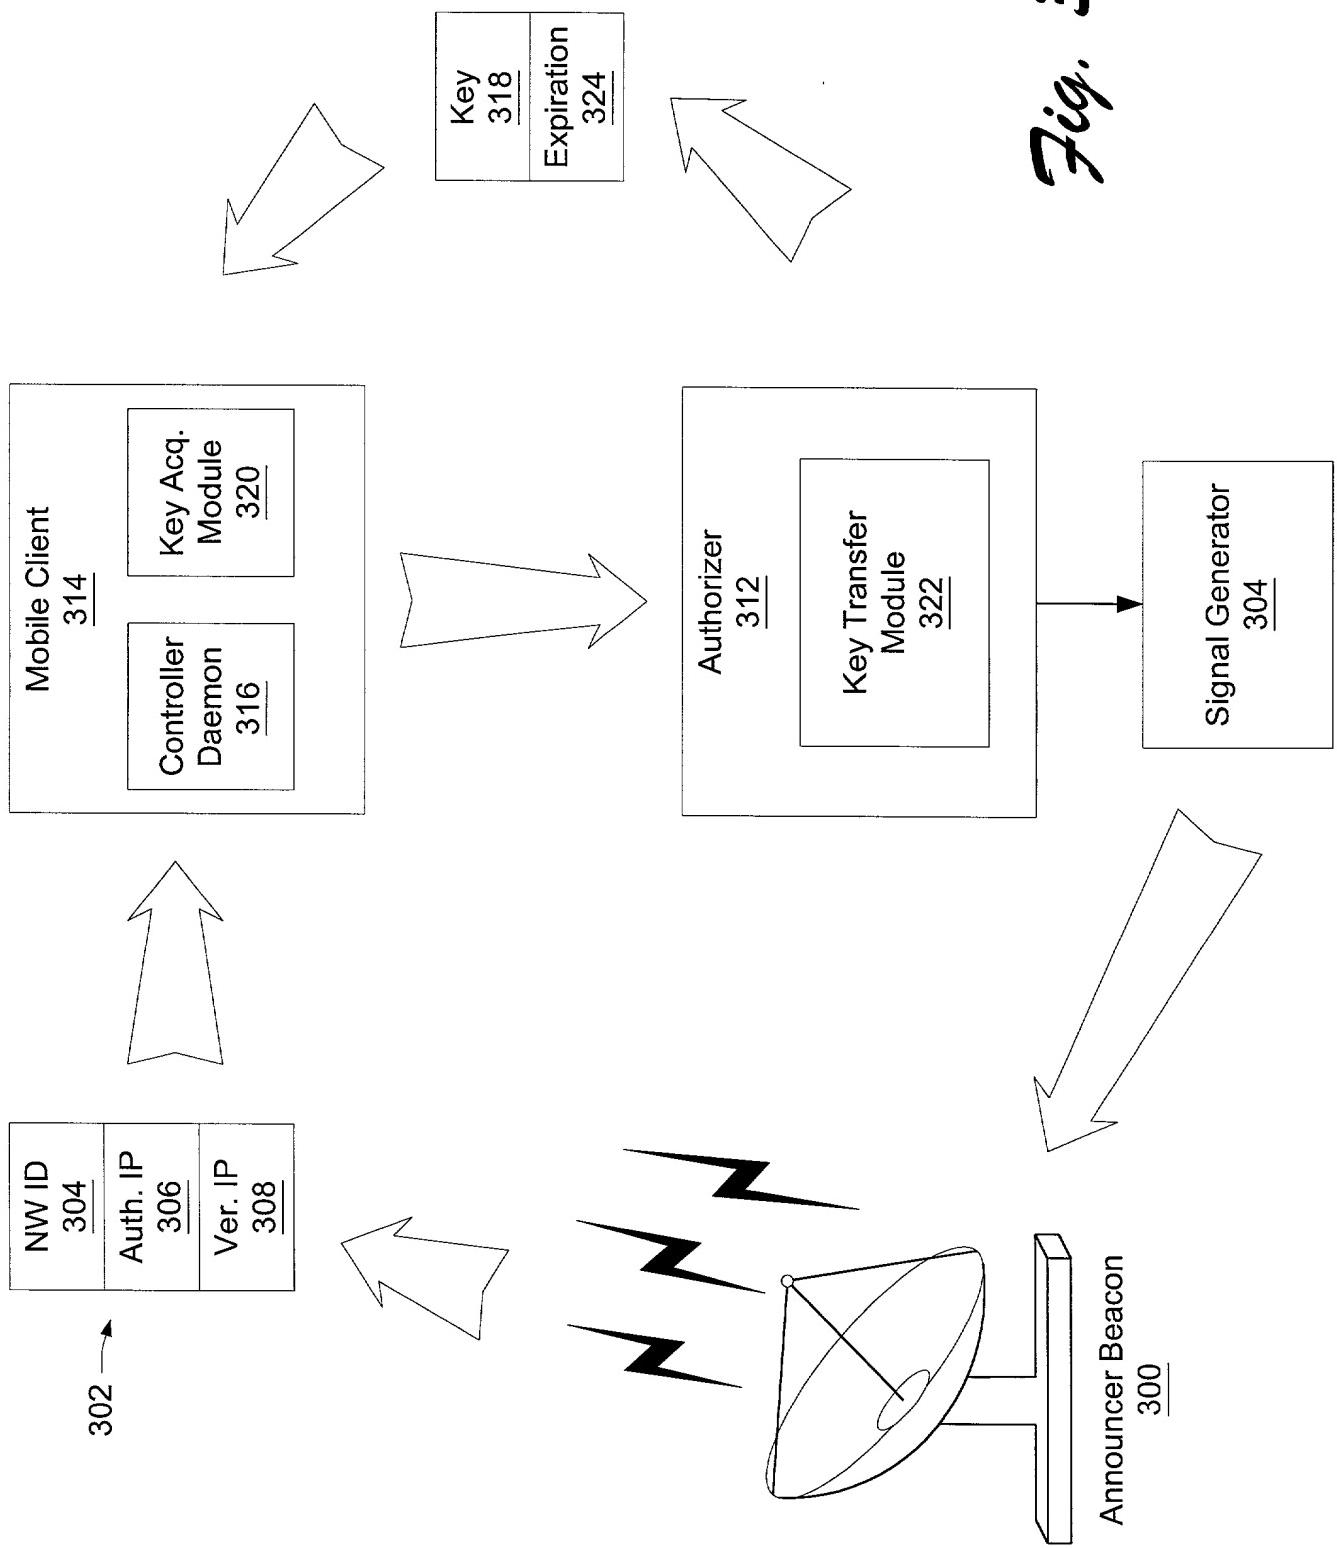

MS1-937US
[REDACTED]

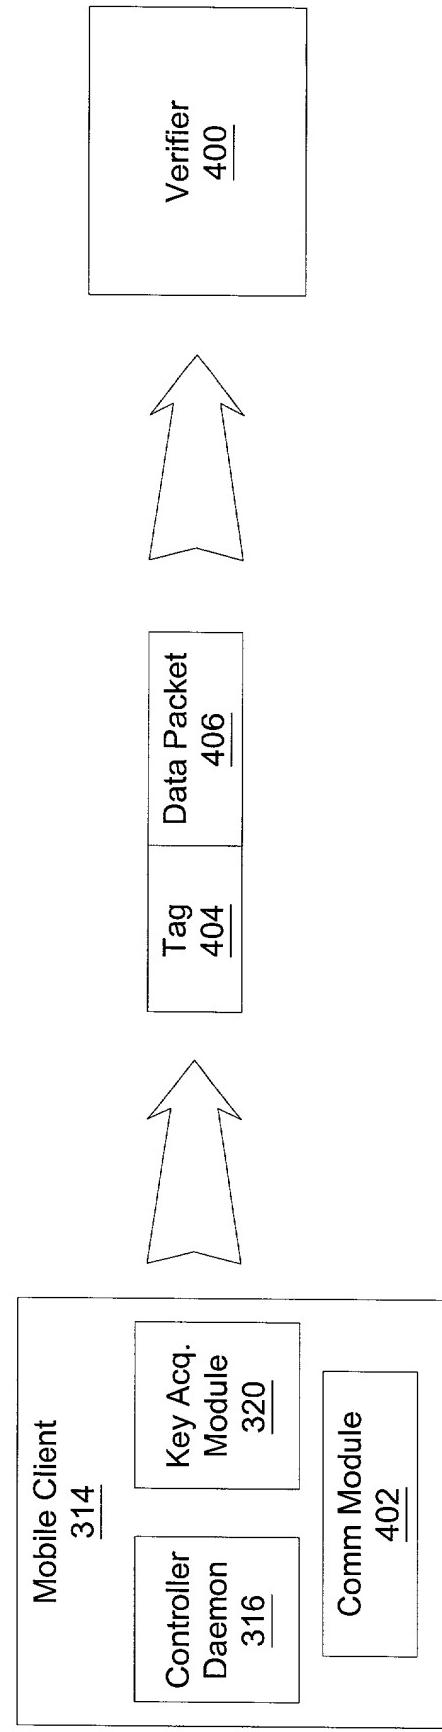


Fig. 4

MS1937US
Extended Announcer Signal

Network ID <u>502</u>	Subnet Mask <u>508</u>	Authorizer Address <u>504</u>	Verifier Address <u>506</u>	Website URL <u>510</u>

Extended Announcer Signal
500

Zig. 5


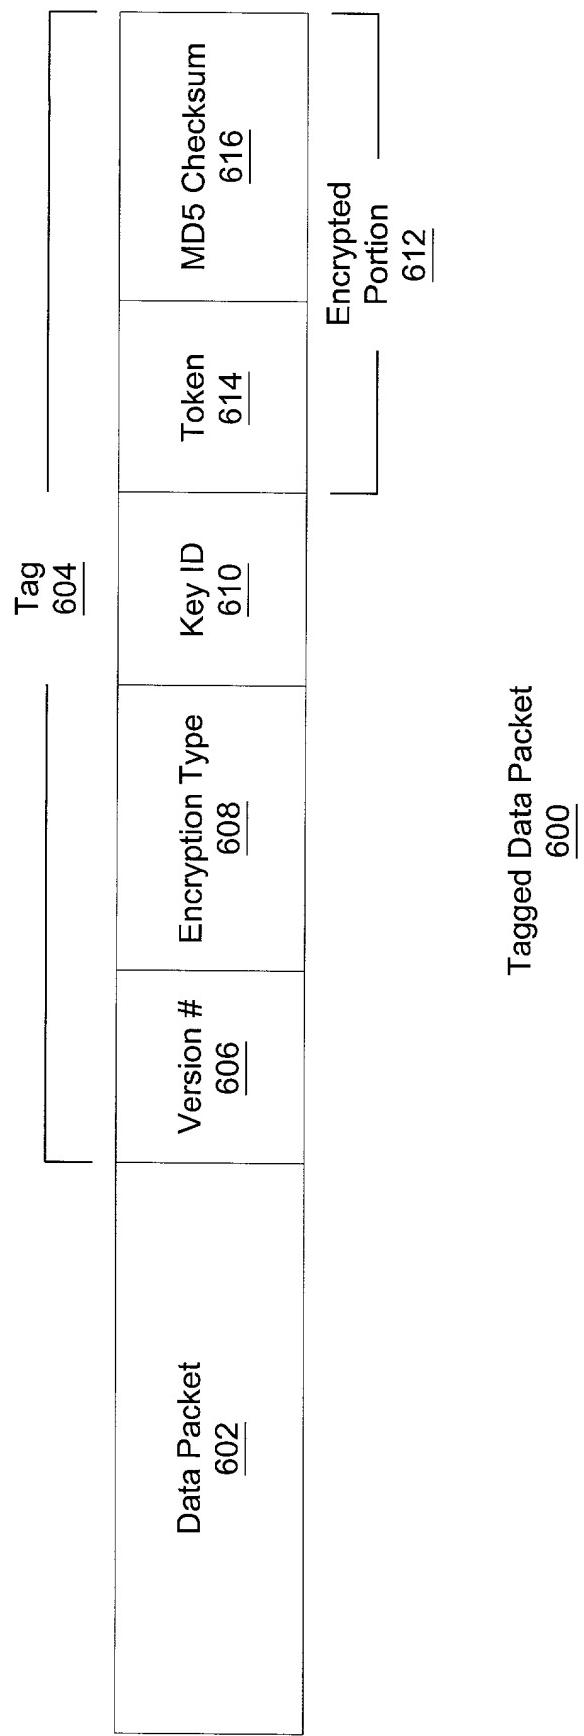


Fig. 6

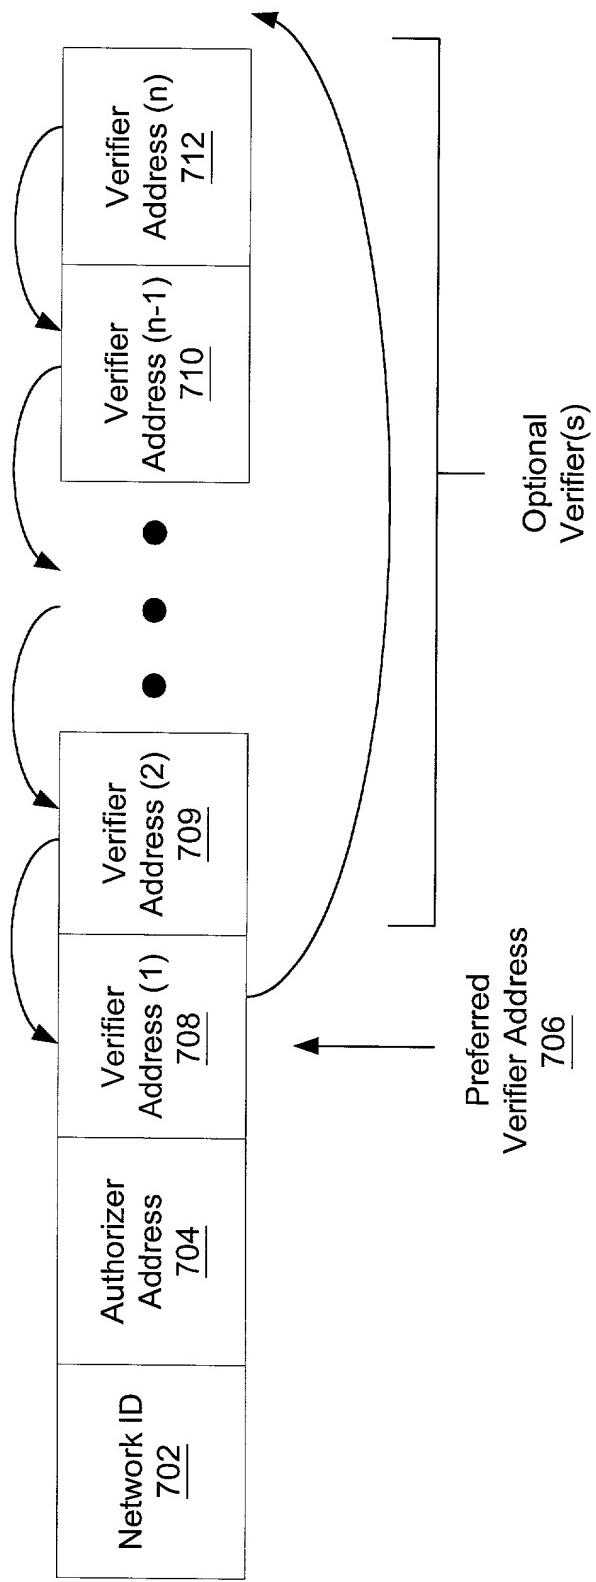

Zig. 7

Announcer Signal With
Load Balancing Feature
700


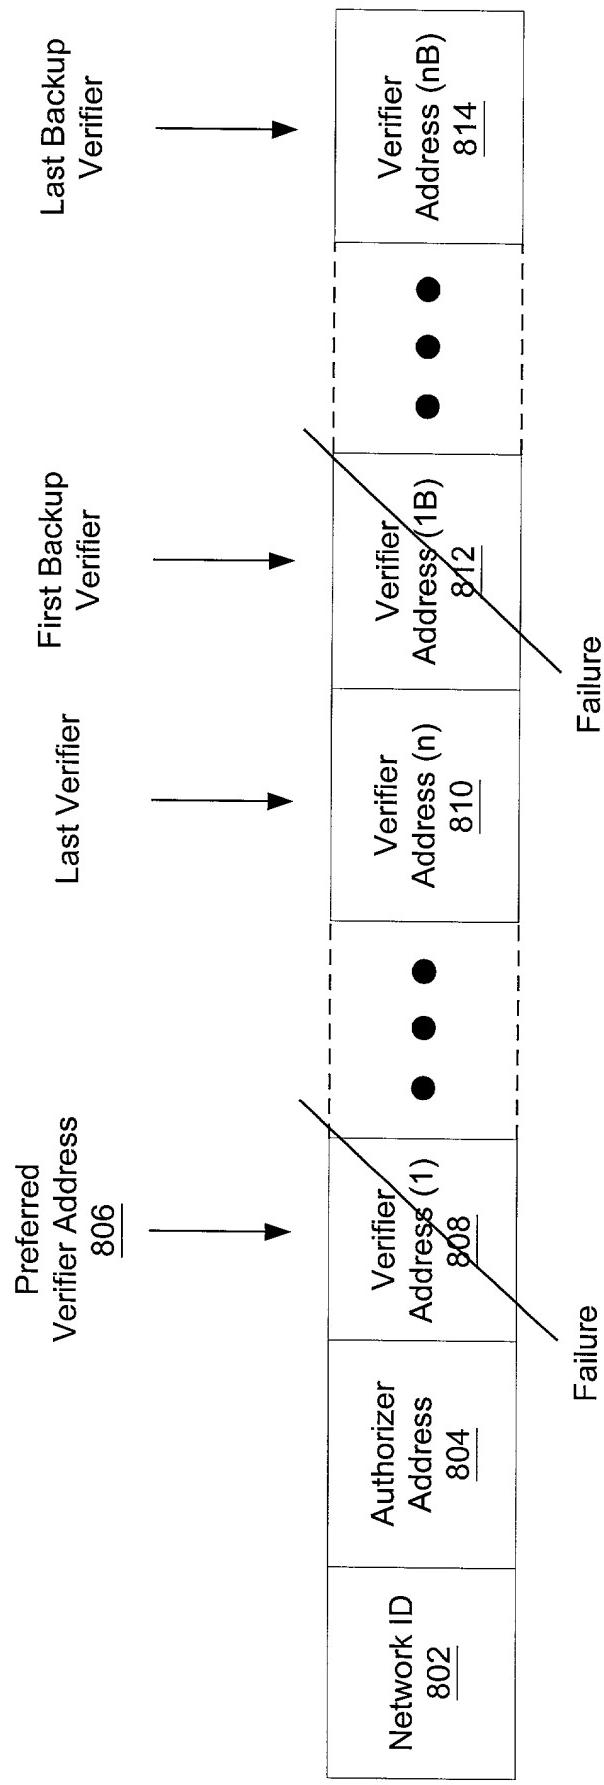


Fig. 8
Announcer Signal
800

MS1-937US

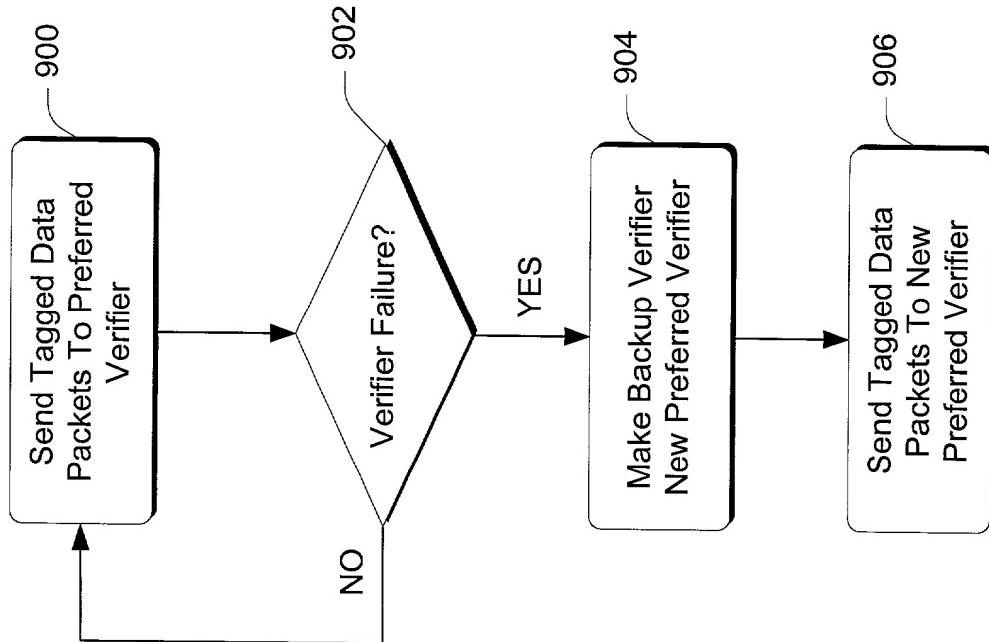

FAULT TOLERANCE

Fig. 9

MS1-937US
Mobile Client

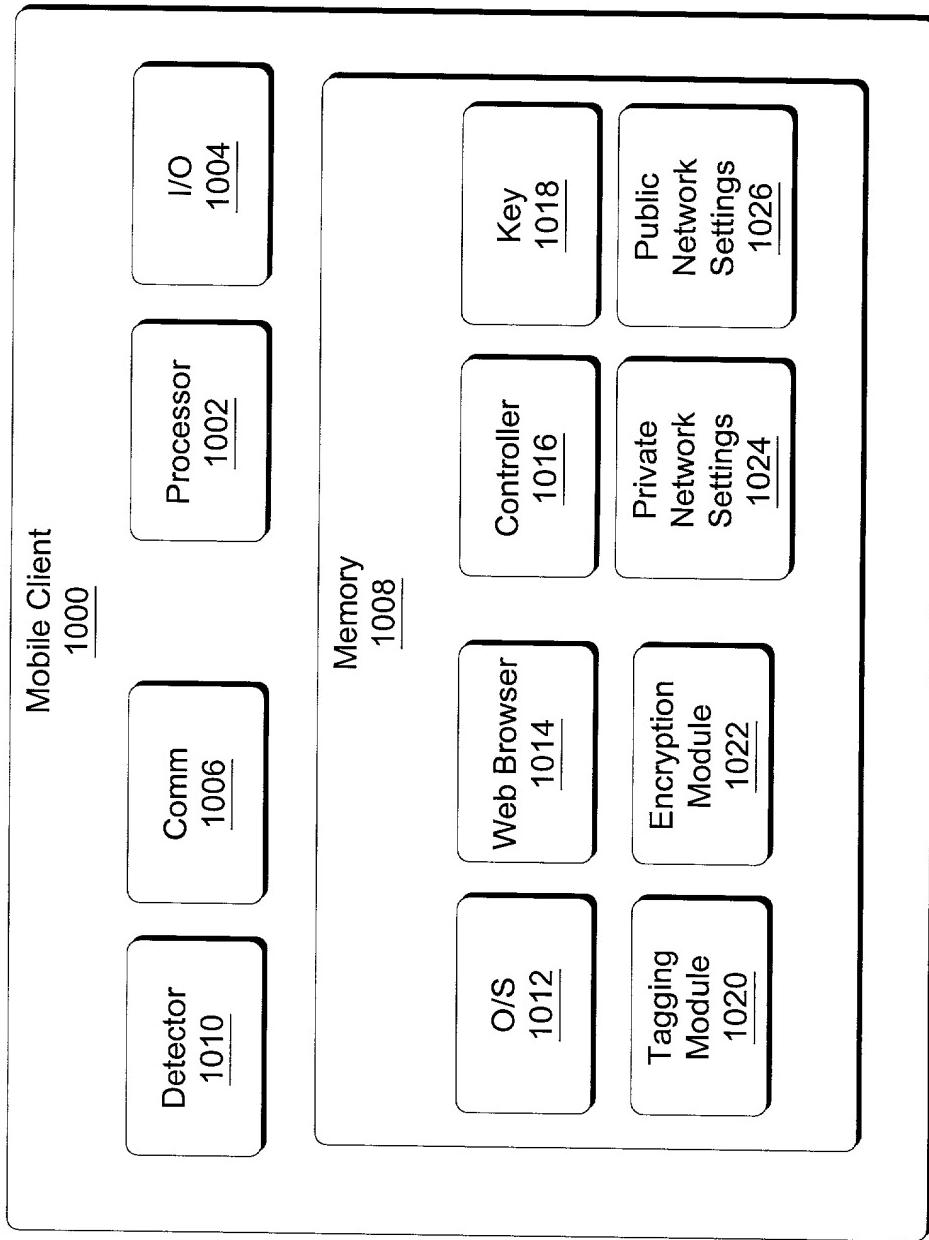


Fig. 10

